



Ruttonsha International Rectifier Ltd.

SILICON CONTROLLED RECTIFIERS

High Power Thyristor Hockey Puk Version

Types : 1700PL/PM 240 to 300


FEATURES

- ❖ Center amplifying gate.
- ❖ Metal case with ceramic insulator
- ❖ High profile hockey - puk.

TYPICAL APPLICATIONS

- ❖ DC motor control (e.g. for machine tools).
- ❖ Controlled rectifiers (e.g. for battery charging, Uninterrupted Power Supply).
- ❖ AC controllers (e.g. for temperature control, lights control).

1700 PL/PM (L-PUK/M-PUK)

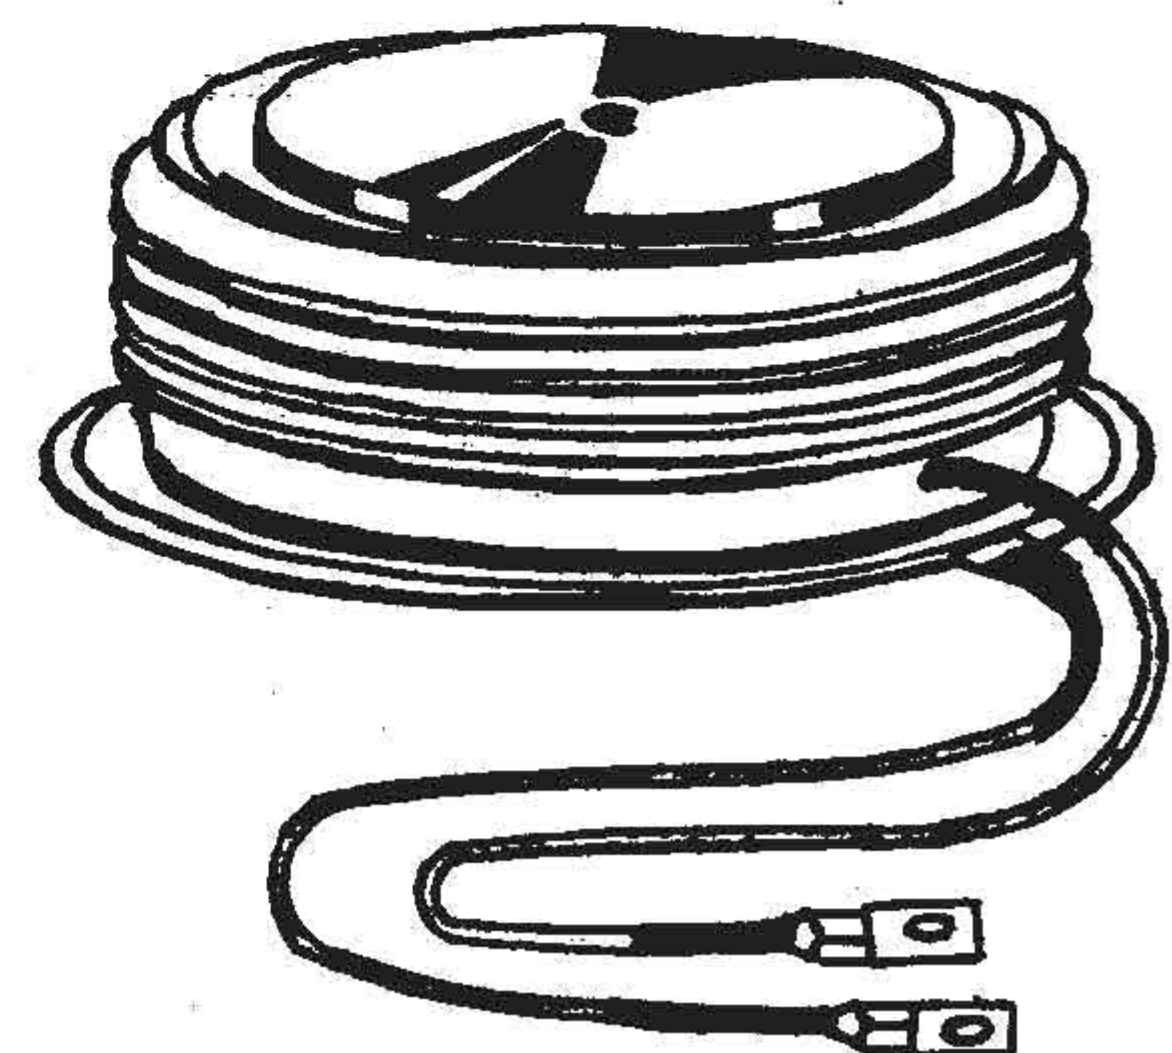

Major Ratings and Characteristics

Parameter	1700PL/PM	Units
$I_{T(AV)}$	1700	A
$@ T_{hs}$	55	°C
$I_{T(RMS)}$	2669	A
$@ T_{hs}$	55	°C
I_{TSM} @ 50 Hz	30	kA
I^2t @ 50 Hz	4500	KA ² s
V_{DRM}/V_{RRM}	2400 to 3000	V
t_q typical	400	μs
T_J	-40 to 125	°C

SILICON CONTROLLED RECTIFIERS

ELECTRICAL SPECIFICATIONS

1700 PL/PM

Voltage Ratings

Type number	Voltage Code	V_{DRM}/V_{RRM} , max repetitive peak and off-state voltage V	V_{RSM} , maximum non-repetitive peak voltage V	I_{DRM}/I_{RRM} max. @ $T_J = T_J$ max. mA
1700PL/PM	240	2400 / 2400	2500	150
	260	2600 / 2600	2700	
	280	2800 / 2800	2900	
	300	3000 / 3000	3100	

On - state Conduction

Parameter	1700PL/PM	Units	Conditions
$I_{T(AV)}$ Max. average on-state current @ Heatsink temperature	1700	A	180° conduction, half sine wave double side cooled
	55	°C	
$I_{T(RMS)}$ Max RMS on-state current	2669	A	DC @ 55°C heatsink temperature double side cooled
I_{TSM} Max. peak, one-cycle non-repetitive surge current	30	KA	t = 10 ms
			Sinusoidal half wave, Initial $T_J = T_J$ max.
I^2t Maximum I^2t for fusing	4500	KA ² s	t = 10 ms
$V_{T(TO)}$ Threshold voltage	1.05	V	$T_J = T_J$ max
r_t On-state slope resistance	0.33	mΩ	$T_J = T_J$ max.
V_{TM} Max. on state voltage	2.08	V	$I_{PK} = 3220A, T_J = T_J$ max, $t_p = 10$ ms sine pulse
I_H Maximum holding current	600	mA	$T_J = 25^\circ C$, anode supply 12 V resistive load
I_L Maximum latching current	1000		

SILICON CONTROLLED RECTIFIERS

1700PL/PM Series

Switching

Parameter	1700PL/PM	Units	Conditions
di/dt Max. non-repetitive rate of rise of turned-on current	100	A/μs	Gate drive 20V, 20Ω, $t_r \leq 1\mu s$ $T_J = T_J \text{ max. anode voltage} \leq 80\% V_{DRM}$
t_q Typical turn-off time	400	μs	$I_{TM} = 1000A$, $T_J = T_J \text{ max.}$ di/dt = 10A/μs, $V_R = 50V$ dv/dt = 200V/μs, 80% V_{DRM} Reapplied, $t_p = 1000\mu s$

Blocking

Parameter	1700PL/PM	Units	Conditions
dv/dt Maximum critical rate of rise of off-state voltage	500	V/μs	$T_J = T_J \text{ max. linear to } 80\% \text{ rated } V_{DRM}$
I_{RRM} I_{DRM} Max. peak reverse and off-state leakage current	150	mA	$T_J = T_J \text{ max. rated } V_{DRM} / V_{RRM} \text{ applied}$

*Higher dv/dt is available on request

Triggering

Parameter	1700PL/PM	Units	Conditions
P_{GM} Maximum peak gate power	30	W	$T_J = T_J \text{ max.}, t_p \leq 5 \text{ ms}$
$P_{G(AV)}$ Maximum average gate power	5		$T_J = T_J \text{ max.}, f = 50\text{Hz}, d\% = 50$
I_{GM} Max. peak positive gate current	3.0	A	$T_J = T_J \text{ max.}, t_p \leq 5 \text{ ms}$
$+V_{GM}$ Maximum peak positive gate voltage	20	V	$T_J = T_J \text{ max.}, t_p \leq 5 \text{ ms}$
$-V_{GM}$ Maximum peak negative gate voltage	5.0		
I_{GT} DC gate current required to trigger	250 max	mA	$T_J = 25^\circ C$ Max.required gate trigger/ current/voltage are the lowest value which will trigger all units 12 V anode-to-cathode applied
V_{GT} DC gate voltage required to trigger	3.0 max	V	$T_J = 25^\circ C$
I_{GD} DC gate current not to trigger	10	mA	$T_J = T_J \text{ max.}$ Max. gate current/voltage not to trigger is the max. value which will not trigger any unit with rated V_{DRM} anode-to-cathode applied
V_{GD} DC gate voltage not to trigger	0.25	V	

SILICON CONTROLLED RECTIFIERS

1700PL/PM SERIES

Thermal and Mechanical Specifications

Parameter		1700PL/PM	Units	Conditions
T _J	Max.operating temperature range	-40 to 125	°C	
T _{stg}	Max.storage temperature range	-40 to 150		
R _{thJ-hs}	Max. thermal resistance, junction to heatsink	0.017	K/W	DC operation double side cooled
F	Mounting force, ± 10%	30	KN	
wt	Approximate weight	850 / 1000	g	
Case style		L-PUK/M-PUK	See Outline Table	

