



RUTTONSHA

Ruttonsha International Rectifier Ltd.

SILICON RECTIFIERS


450 Ampere Silicon Power Diodes Type R 450A

FEATURES

- ❖ All diffused design.
- ❖ Low voltage drop.
- ❖ High surge current capability.
- ❖ Low thermal impedance.

VOLTAGE CODE	02	04	06	08	10	12	14	16
V_{RRM}	200	400	600	800	1000	1200	1400	1600
V_{RSM}	300	500	700	900	1100	1300	1500	1700

V_{RRM} = Repetitive peak voltage
 V_{RSM} = Non-repetitive peak voltage

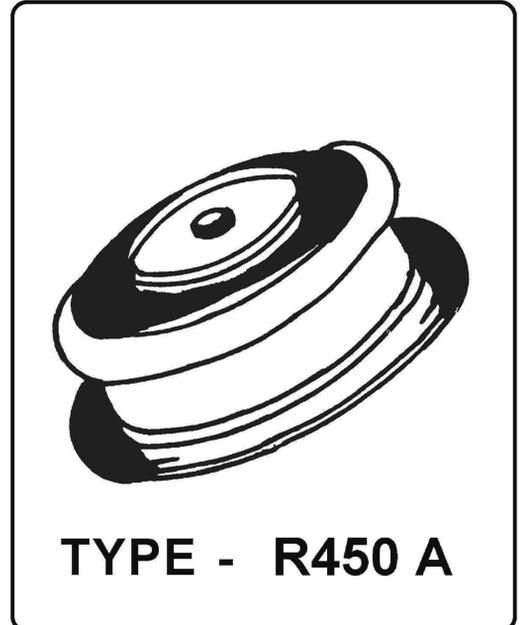

Ratings (Maximum values at 160°C T_j unless stated otherwise)

RATING	CONDITIONS	SYMBOL	
Average forward current	Half sine wave T _{hs} = 95°C (double side cooled)	$I_{F(AV)}$	450A
RMS current	95°C heat sink temperature, double side cooled	$I_{F(RMS)}$	706A
Peak one-cycle surge (non-repetitive)	10ms duration		6050A
Maximum permissible surge energy	For fusing ≥ 10ms	I^2t	183000A ² s
Operating temperature range	Heatsink temperature	T _{hs}	-40+160°C
Storage temperature		T _{stg}	-40+180°C

Characteristics (Maximum values at 180°C T_j unless stated otherwise)

CHARACTERISTIC	CONDITIONS	SYMBOL	
Peak forward voltage drop	At 1500 A, I_{FM}	V_{FM}	1.80 V
Forward conduction threshold voltage		V_O	0.85 V
Forward conduction slope resistance		r_O	0.70m Ω
Peak reverse current	At V_{RRM}	I_{RRM}	15mA
Thermal resistance junction to heatsink for a device with a maximum forward voltage drop	Double side cooled — $\left\{ \begin{array}{l} 180^\circ \text{ sine wave} \\ 120^\circ \text{ rect. wave} \end{array} \right.$		0.090° C/W 0.094° C/W


Ordering Information (please quote device code as explained below - 8 digits)

R 650 A	--	C	Typical code : R 450A = 1200 V_{RRM} , Capsule outline
5 Fixed digits	Voltage code	Capsule outline	

SILICON RECTIFIERS

R450A... SERIES

Outline Table

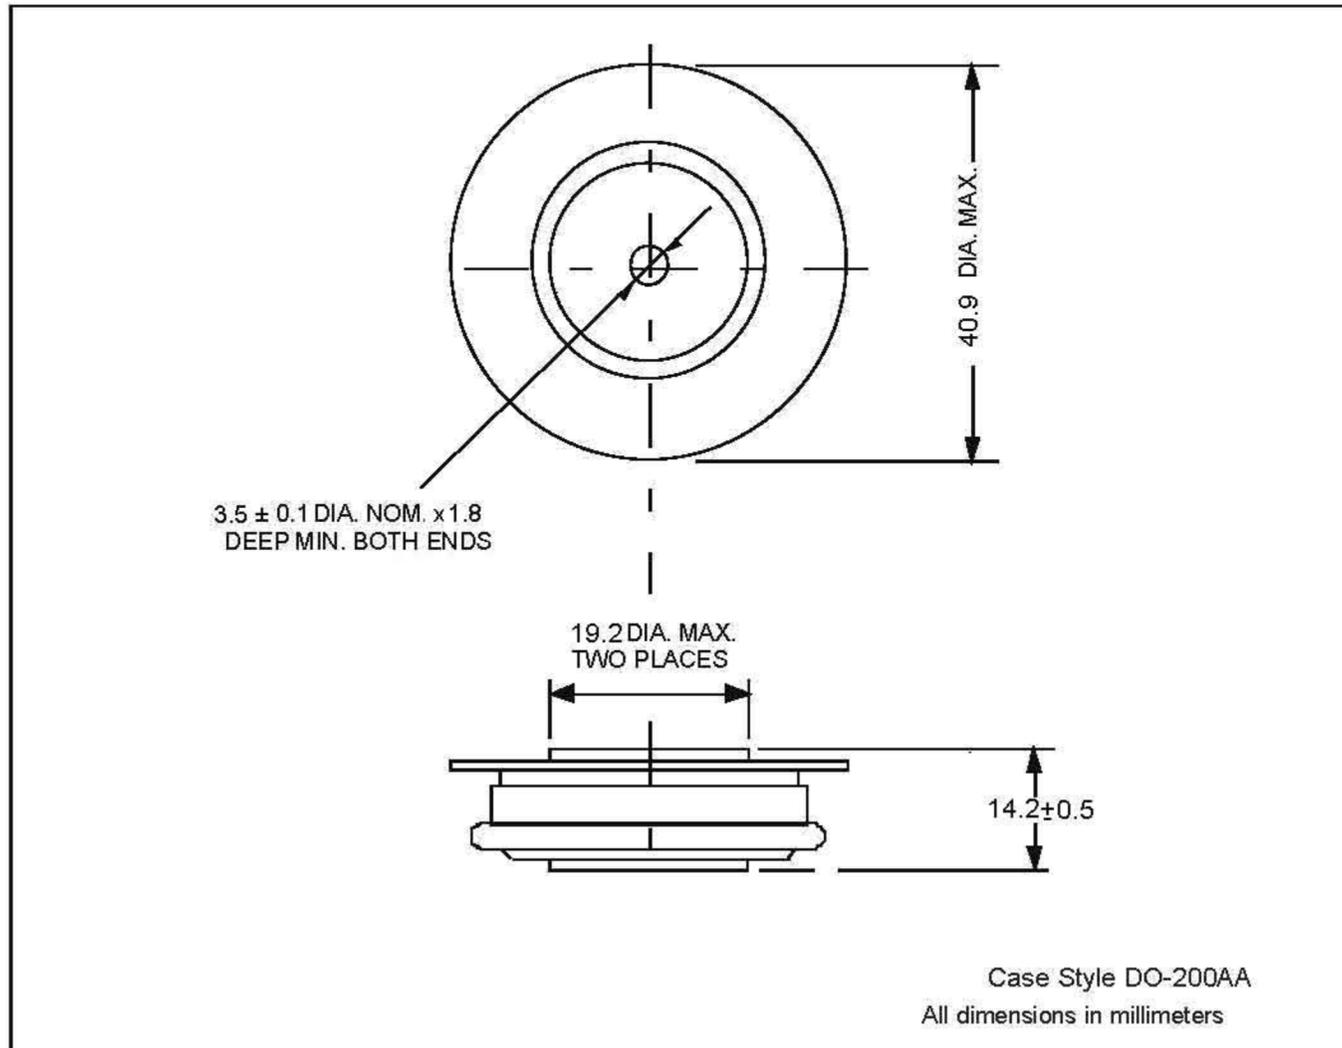

SILICON RECTIFIERS

R450A

