



High Power Thyristor Hockey Puk Version

Q-PUK/R-PUK Series 2200PQ/PR


Types : 2200 PQ/PR
280 to 380

FEATURES

- ❖ Center amplifying gate.
- ❖ Metal case with ceramic insulator
- ❖ High profile hockey - puk.

TYPICAL APPLICATIONS

- ❖ DC motor control (e.g. for machine tools).
- ❖ Controlled rectifiers (e.g. for battery charging, Uninterrupted Power Supply).
- ❖ AC controllers (e.g. for temperature control, lights control).

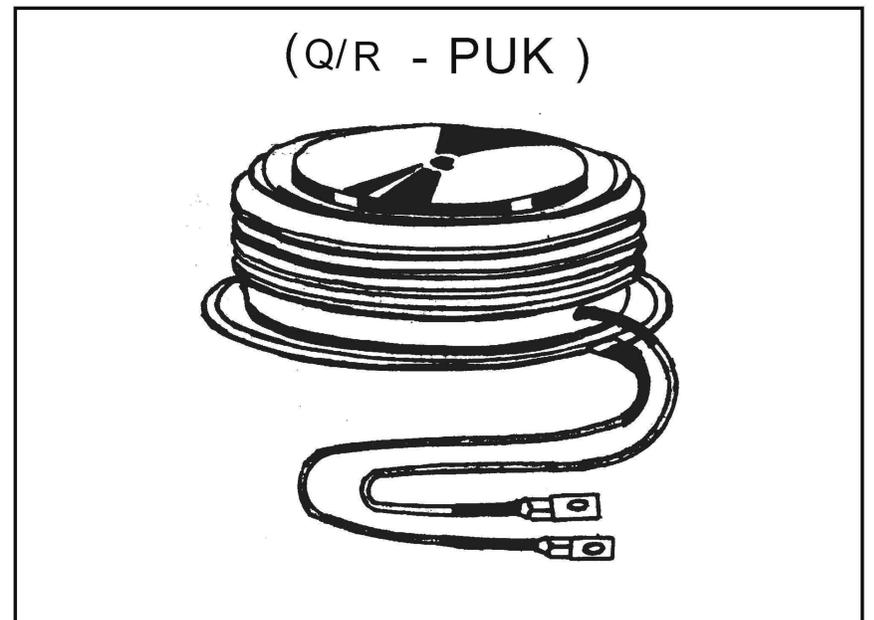

Major Ratings and Characteristics

Parameter	2200 PQ/PR	Units
$I_{T(AV)}$	2200	A
@ T_{hs}	55	°C
$I_{T(RMS)}$	3454	A
@ T_{hs}	55	°C
I_{TSM} @ 50 Hz	27000	A
I^2t @ 50 Hz	3645	KA ² s
V_{DRM} / V_{RRM}	2800 to 3800	V
t_q typical	300	μs
T_J	-40 to 125	°C

SILICON CONTROLLED RECTIFIERS

ELECTRICAL SPECIFICATIONS

Types : 2200PQ/PR

Voltage Ratings

Type number	Voltage Code	V_{DRM}/V_{RRM} , max repetitive peak and off-state voltage V	V_{RSM} , maximum non-repetitive peak voltage V	I_{DRM}/I_{RRM} max. @ $T_J = T_J$ max. mA
2200PQ/PR	280	2800/2800	2900	100
	300	3000/3000	3100	
	320	3200/3200	3300	
	340	3400/3400	3500	
	360	3600/3600	3700	
	380	3800/3800	3900	

On - state Conduction

Parameter	2200PQ/PR	Units	Conditions
$I_{T(AV)}$ Max. average on-state current @ Heatsink temperature	2200	A	180° conduction, half sine wave double side cooled
	55	°C	
$I_{T(RMS)}$ Max RMS on-state current	3454	A	DC @ 55°C heatsink temperature double side cooled
I_{TSM} Max. peak, one-cycle non-repetitive surge current	27	kA	t = 10 ms
			Sinusoidal half wave, Initial $T_J = T_J$ max.
I^2t Maximum I^2t for fusing	3645	KA ² s	t = 10 ms
$V_{T(TO)}$ Threshold voltage	1.16	V	$T_J = T_J$ max
r_t On-state slope resistance	0.28	mΩ	$T_J = T_J$ max.
V_{TM} Max. on state voltage	1.71	V	$I_{PK} = 2000A, T_J = T_J$ max, $t_p = 10$ ms sine pulse
I_H Maximum holding current	400	mA	$T_J = 25^\circ C$, anode supply 12 V resistive load
I_L Maximum latching current	1000	mA	

SILICON CONTROLLED RECTIFIERS

Types : 2200PQ/PR

Switching

Parameter	2200PQ/PR	Units	Conditions
di/dt Max. non-repetitive rate of rise of turned-on current	100	A/μs	Gate drive 20V, 20Ω, $t_r \leq 1\mu s$ $T_J = T_J \text{ max. anode voltage} \leq 80\% V_{DRM}$
t_q Typical turn-off time	300	μs	$I_{TM} = 1000A, T_J = T_J \text{ max. di/dt} = 40A/\mu s, V_R = 75V$ $dv/dt = 50V/\mu s, 0.5 V_{DRM} \text{ Reapplied, } t_p = 500\mu s$

Blocking

Parameter	2200PQ/PR	Units	Conditions
dv/dt Maximum critical rate of rise of off-state voltage	500	V/μs	$T_J = T_J \text{ max. linear to } 80\% \text{ rated } V_{DRM}$
I_{RRM} I_{DRM} Max. peak reverse and off-state leakage current	100	mA	$T_J = T_J \text{ max. rated } V_{DRM} / V_{RRM} \text{ applied}$

*Higher dv/dt is available on request

Triggering

Parameter	2200PQ/PR	Units	Conditions
P_{GM} Maximum peak gate power	30	W	$T_J = T_J \text{ max., } t_p \leq 5 \text{ ms}$
$P_{G(AV)}$ Maximum average gate power	5		$T_J = T_J \text{ max., } f = 50\text{Hz, } d\% = 50$
I_{GM} Max. peak positive gate current	3.0	A	$T_J = T_J \text{ max., } t_p \leq 5 \text{ ms}$
$+V_{GM}$ Maximum peak positive gate voltage	20	V	$T_J = T_J \text{ max., } t_p \leq 5 \text{ ms}$
$-V_{GM}$ Maximum peak negative gate voltage	5.0		
I_{GT} DC gate current required to trigger	250 MAX.	mA	$T_J = 25^\circ C$ Max.required gate trigger/ current/voltage are the lowest value which will trigger all units 12 V anode-to-cathode applied
V_{GT} DC gate voltage required to trigger	3.0 MAX.	V	$T_J = 25^\circ C$
I_{GD} DC gate current not to trigger	10	mA	$T_J = T_J \text{ max.}$ Max. gate current/voltage not to trigger is the max. value which will not trigger any unit with rated V_{DRM} anode-to-cathode applied
V_{GD} DC gate voltage not to trigger	0.25	V	

PHASE CONTROL THYRISTORS

Types : 2200PQ/PR

Thermal and Mechanical Specifications

Parameter	2200PQ/PR	Units	Conditions
T_J	Max.operating temperature range	-40 to 125	°C
T_{stg}	Max.storage temperature range	-40 to 150	
R_{thJ-hs}	Max. thermal resistance, junction to heatsink	0.012	K/W DC operation double side cooled
F	Mounting force, $\pm 10\%$	40	KN
wt	Approximate weight	1050/1500	g
Case style	Q-PUK/R-PUK		See Outline Table

(Q - PUK)

(R - PUK)

